


STORM



AUTO PAINTING-DRYING SPRAY BOOTHS

- | | | |
|-----------------------------------|-----------------------------|---------------------------|
| 1- Basement Grates | 7- Burner | 13- Exhaust Damper |
| 2- Floor Filter Type EU3 | 8- Fresh Air Fan | 14- Booth Chassis |
| 3- Isolated Wall Panels | 9- Front Filter Type EU4 | 15- Airjet Nozzles |
| 4- Lighting | 10- Fresh Air Damper | 16- Service Door |
| 5- Ceiling Filter Filter Type EU5 | 11- Exhaust Filter Type EU3 | 17- Digital Control Panel |
| 6- Cr-Ni Exchanger | 12- Exhaust Fan | |

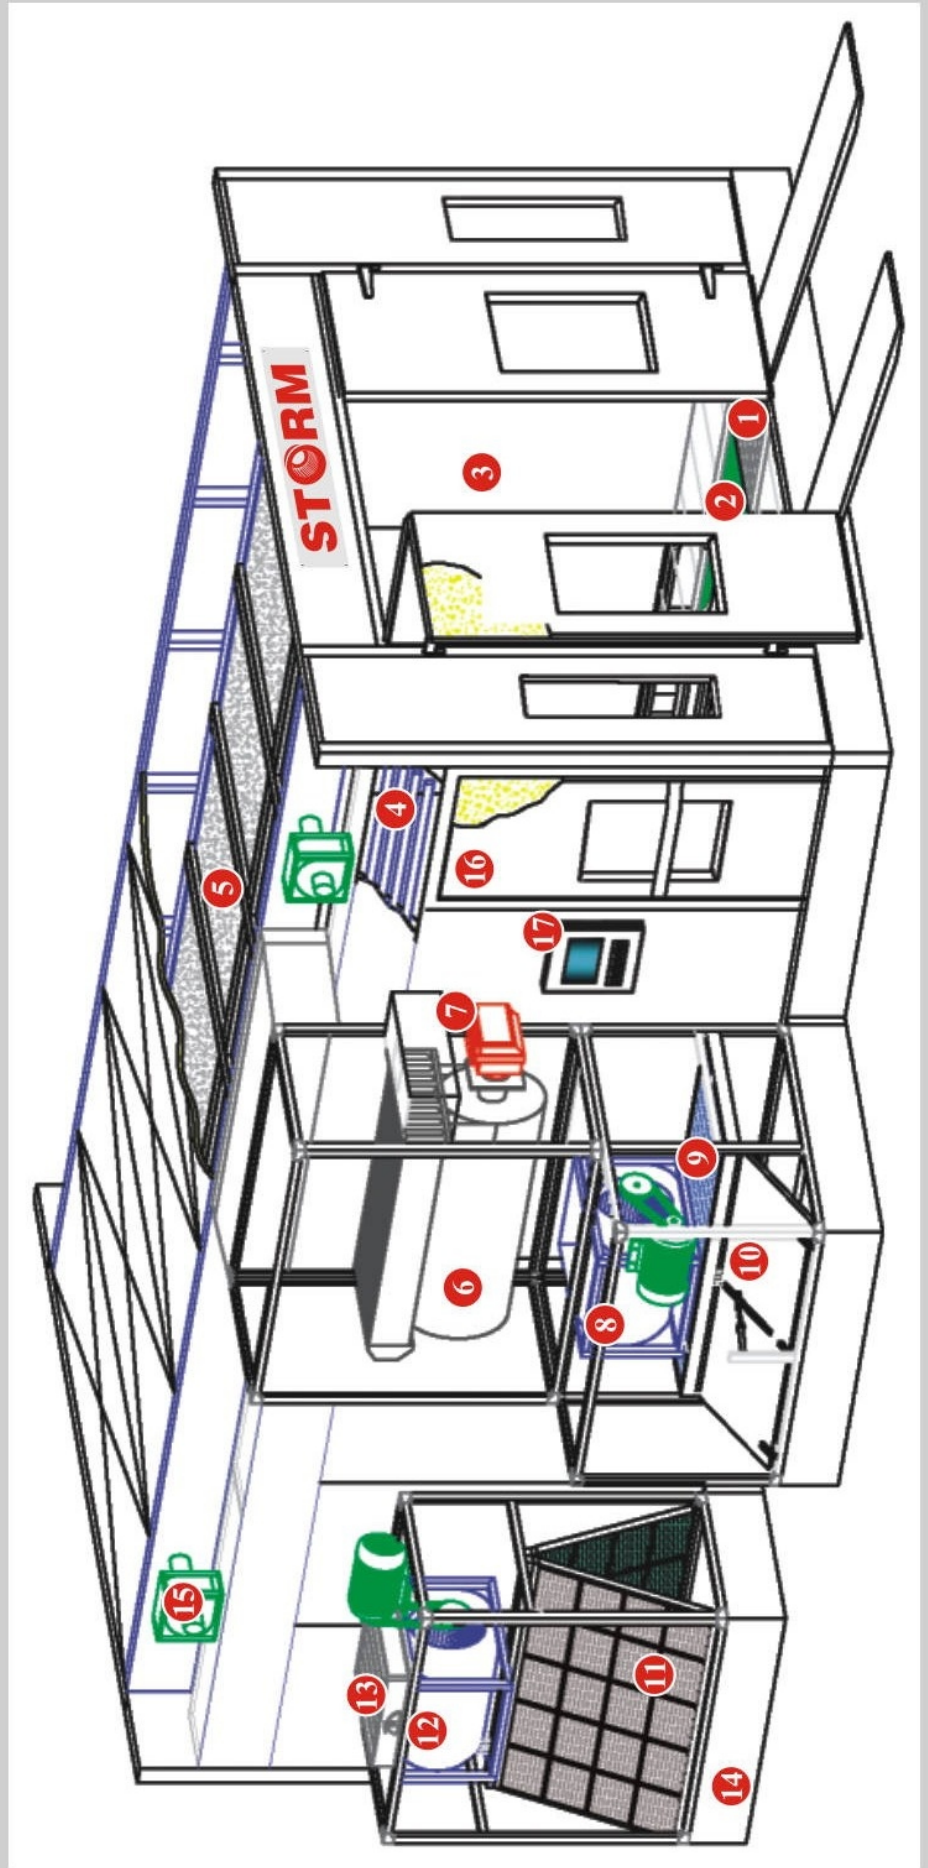

**Technical Specifications** **Automobile Spray Booths**

Model Code	STORM 6000
Internal Length	6000 mm
Internal Width	3800 mm
Internal Height	2500 mm
External Length	6200 mm
External Width	3880 mm
External Height	3130 mm
Motor	7.5 HP
Exhaust Motor	5.5 HP
Fresh Air Fan Capacity	18.000 m ³ /h
Exhaust Fan Capacity	18.000 m ³ /h
Burner Heating Capacity	150.000 Kcal/h
Max Drying Temperature	60 °C / 80 °C
Lighting	24x36 Watt
Total Power	15 KW

**Technical Specifications** **Automobile Spray Booths**

Model Code	STORM 7000
Internal Length	7000 mm
Internal Width	3800 mm
Internal Height	2500 mm
External Length	7200 mm
External Width	3880 mm
External Height	3130 mm
Motor	7.5 HP
Exhaust Motor	5.5 HP
Fresh Air Fan Capacity	18.000 m ³ /h
Exhaust Fan Capacity	18.000 m ³ /h
Burner Heating Capacity	150.000 Kcal/h
Max Drying Temperature	60 °C / 80 °C
Lighting	30x36 Watt
Total Power	15 KW

Storm aims to supply best quality service and customer satisfaction.



Technical Specifications	Automobile Spray Booths
Model Code	STORM 7000 Y
Internal Length	7000 mm
Internal Width	4000 mm
Internal Height	2650 mm
External Length	7200 mm
External Width	4080 mm
External Height	3400 mm
Motor	7.5 HP
Exhaust Motor	5.5 HP
Fresh Air Fan Capacity	18.000 m ³ /h
Exhaust Fan Capacity	18.000 m ³ /h
Burner Heating Capacity	150.000 Kcal/h
Max Drying Temperature	60 °C / 80 °C
Lighting	40x36 Watt
Total Power	15 KW

Technical Specifications	Minibus Spray Booth
Model Code	STORM 7000 MNB
Internal Length	7000 mm
Internal Width	4000 mm
Internal Height	3070 mm
External Length	7200 mm
External Width	4080 mm
External Height	3940 mm
Motor	7.5 HP
Exhaust Motor	7.5 HP
Fresh Air Fan Capacity	18.000 m ³ /h
Exhaust Fan Capacity	18.000 m ³ /h
Burner Heating Capacity	200.000 Kcal/h
Max Drying Temperature	60 °C / 80 °C
Lighting	40x36 Watt
Total Power	15 KW



Technical Specifications	Water-Borne Spray Booth
Model Code	SB 7000
Internal Length	7000 mm
Internal Width	4000 mm
Internal Height	2650 mm
External Length	7200 mm
External Width	4080 mm
External Height	3400 mm
Motor	7.5 HP
Exhaust Motor	5.5 HP
Fresh Air Fan Capacity	18.000 m ³ /h
Exhaust Fan Capacity	18.000 m ³ /h
Burner Heating Capacity	150.000 Kcal/h
Max Drying Temperature	60 °C / 80 °C
Lighting	40x36 Watt
Total Power	15 KW



Technical Specifications	Water-Borne Spray Booth
Model Code	SB 8000
Internal Length	8000 mm
Internal Width	4000 mm
Internal Height	3070 mm
External Length	8200 mm
External Width	4080 mm
External Height	3940 mm
Motor	7.5 HP
Exhaust Motor	7.5 HP
Fresh Air Fan Capacity	18.000 m ³ /h
Exhaust Fan Capacity	18.000 m ³ /h
Burner Heating Capacity	200.000 Kcal/h
Max Drying Temperature	60 °C / 80 °C
Lighting	40x36 Watt
Total Power	15 KW

In every conditions Storm enables you to save time and also to get the best application.



Technical Specifications	Trade Car Spray Booth
Model Code	L 12000
Internal Length	12.000 mm
Internal Width	4500 mm
Internal Height	4500 mm
External Length	12.200 mm
External Width	6200 mm
External Height	5100 mm
Motor	10 HP x 2
Exhaust Motor	10 HP x 2
Fresh Air Fan Capacity	46.000 m³/h
Exhaust Fan Capacity	46.000 m³/h
Burner Heating Capacity	250.000 Kcal/hx2
Max Drying Temperature	60 °C / 80 °C
Lighting	132x36 Watt
Total Power	45 KW

Storm provides Day-light and Fresh-Air in working area.



Technical Specifications	Bus & Truck Spray Booth
Model Code	STORM 15000
Internal Length	15.000 mm
Internal Width	5000 mm
Internal Height	5000 mm
External Length	15.200 mm
External Width	5120 mm
External Height	5600 mm
Motor	10 HP x 2
Exhaust Motor	10 HP x 2
Fresh Air Fan Capacity	46.000 m ³ /h
Exhaust Fan Capacity	46.000 m ³ /h
Burner Heating Capacity	250.000 Kcal/hx2
Max Drying Temperature	60 °C / 80 °C
Lighting	156x36 Watt
Total Power	45 KW





Technical Specifications	Economic Undercoat Station
Model Code	STORM STATION
Internal Length	6000 mm
Internal Width	3600 mm
Internal Height	2500 mm
External Length	7100 mm
External Width	3600 mm
External Height	2800 mm
Motor	-
Exhaust Motor	7,5 HP
Fresh Air Fan Capacity	-
Exhaust Fan Capacity	15.000 m³/h
Burner Heating Capacity	-
Max Drying Temperature	-
Lighting	8x36 Watt
Total Power	11 KW



Technical Specifications	Single Fan Undercoat Station
Model Code	STORM STATION
Internal Length	6000 mm
Internal Width	3600 mm
Internal Height	2650 mm
External Length	7100 mm
External Width	3600 mm
External Height	3400 mm
Motor	-
Exhaust Motor	10 HP
Fresh Air Fan Capacity	-
Exhaust Fan Capacity	20.000 m³/h
Burner Heating Capacity	-
Max Drying Temperature	-
Lighting	8x36 Watt
Total Power	15 KW

Technical Specifications	Double Fan Undercoat Station
Model Code	STORM STATION
Internal Length	6000 mm
Internal Width	3600 mm
Internal Height	2650 mm
External Length	7600 mm
External Width	3626 mm
External Height	3400 mm
Motor	7.5 HP
Exhaust Motor	10 HP
Fresh Air Fan Capacity	18.000 m³/h
Exhaust Fan Capacity	20.000 m³/h
Burner Heating Capacity	-
Max Drying Temperature	-
Lighting	34x36 Watt
Total Power	15 KW

Excavation Plan to place the units on back side

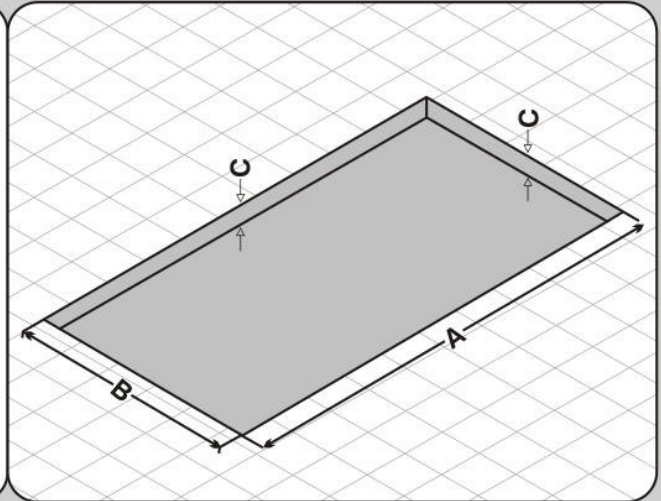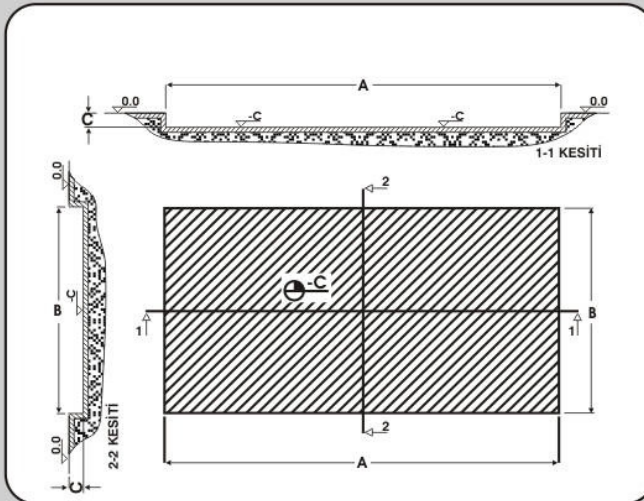

Excavation Plan to place the units on left or right side

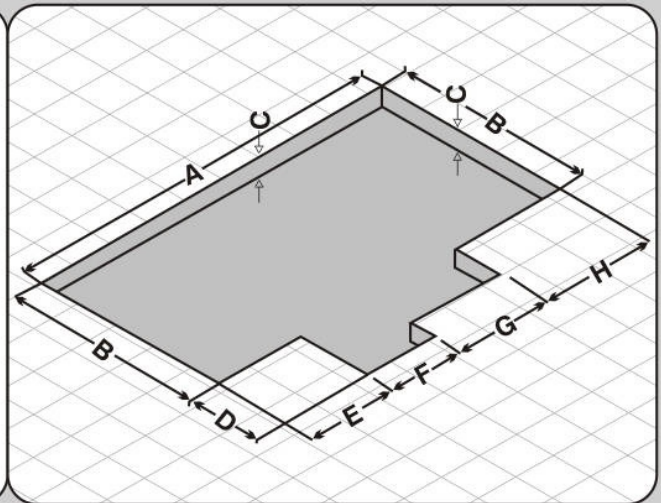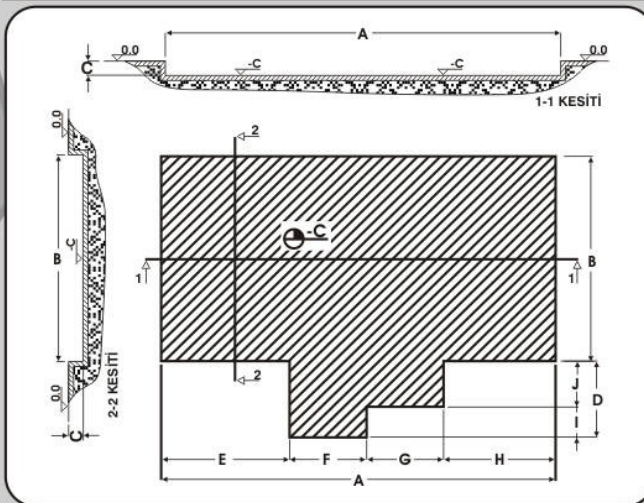

Dimensions " mm "	Units on Back			Units on Right or Left Side								
	A	B	C	A	B	D	E	F	G	H	I	J
STORM 6000	7800	4000	280	6300	4000	1500	1650	1500	1500	1650	500	1000
STORM 7000	8800	4000	280	7300	4000	1500	2150	1500	1500	2150	500	1000
STORM 6000YT	7800	4200	380	6300	4200	1500	2000	1500	1500	1300	500	1000
STORM 7000YT	8800	4200	380	7300	4200	1500	2500	1500	1500	1800	500	1000
STORM 7000M	8800	4200	380	7300	4200	1500	2500	1500	2200	1100	500	1000
STORM 8000M	9800	4200	380	8300	4200	1500	2500	1500	2200	2100	500	1000
ASTAR 6000	7800	3800	280	7800	3800	1500						
ASTAR 7000	8800	3800	280	8800	3800	1500						
ASTAR 7000M	8800	3800	280	8800	3800	1500						

According to the architecture of building , The dimesions of excavation can be changed



Auto Painting and Drying Spray Booth

Original Spare Parts



Air-jet Nozzles for Water-Borne Paint



Day Light Florescent and Electronic Ballast



Digital Control Panel



• Ceiling Filter EU5



• Front Filter EU3



• Panel Saver




• Ground Filter EU3




• Stainless Exchanger



High Efficiency Burner



Special Door Joints



Interior Door Lock



Impact Door Locks



Special Production Fans



BOYAHANE TESİSLERİ SAN. TİC. LTD. ŞTİ.

www.stormspraybooth.com

1348 Sk. Keremoğlu İş Merkezi No:2/2-P
Yenişehir - İZMİR / TURKEY

Tel : +90 232 433 03 01 (Pbx)

Fax : +90 232 433 03 15

e-mail:storm@stormspraybooth.com

After-Sales Service Guaranty

STORM

STORM

STORM

STORM

STORM

STORM

STORM

STORM

STORM

STORM

STORM

STORM

STORM

STORM

STORM